

DOWNLIGHT ECO




LEVETID: GARANTI:
+50.000 timer 5 år



Produkt nr.	Effekt/Watt	Lumen(LM)	Farvetemperatur(K)	Farvegengivelse(RA)
Downlight-eco-10w-3	10	850	3000	80
Downlight-eco-15w-3	15	1275	3000	80

DIMENSIONER

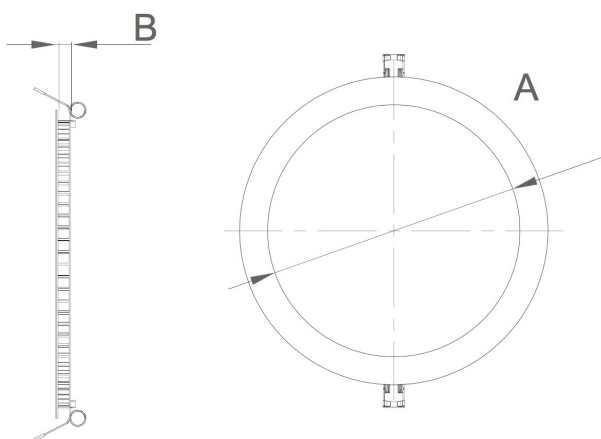

Downlight-eco-10w-3	A=180 mm	B=12,5 mm	Hulmål=168 mm
Downlight-eco-15w-3	A=240 mm	B=12,5 mm	Hulmål=228 mm

TEKNISKE SPECIFIKATIONER

Power: 220-240V AC 50/60 Hz

PF: 0,93

Effektivitet: 85Lm/W

SDCM: 3

Spredningsvinkel: 120°

Blændingsgrad: UGR <19

Kapslingsklasse: IP20

Isolationsklasse: II

Standard: Dali / Push / 1-10V

Omgivelsestemperatur: -20°C til +40°C

L90B50: 50.000 timer

PRODUKT INFORMATION

Montering: Direkte i loft med respekt-afstand

Materiale: Aluminium

Cover: Standard prismatisk

Farve: Hvid

Pakningsstørrelse: 5 stk.

ANVENDELSESOMRÅDER

Industri/erhvervsbygninger såsom:

- Gangarealer
- Aktivitetsarealer