

# DOWNLIGHT PLUS




LEVETID: +50.000 timer  
GARANTI: 5 år



Produkt nr.	Effekt/Watt	Lumen(LM)	Farvetemperatur(K)	Farvegengivelse(RA)
E3R-11-3	11	1000	3000	80
E4R-16-3	16	1600	3000	80
E6R-22-3	22	2200	3000	80
E8R-35-3	35	3500	3000	80

MT-ML30C-PDV LED Driver

## DIMENSIONER

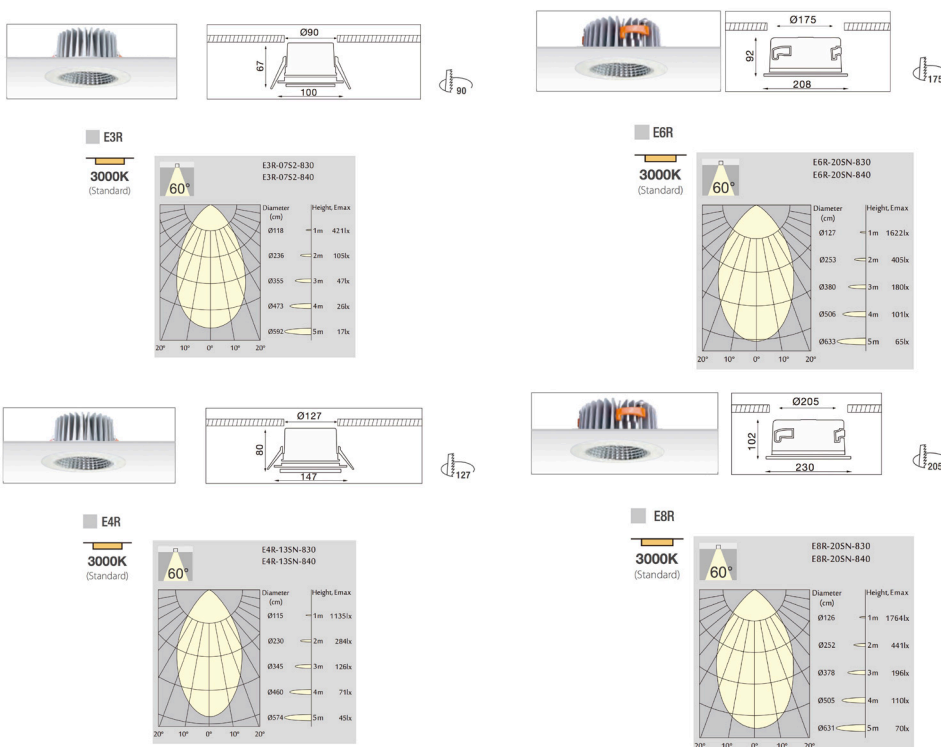

## TEKNISKE SPECIFIKATIONER

Power: 220-240V AC 50/60 Hz

PF: 0,95

Effektivitet: 100Lm/W

SDCM: 3

Spredningsvinkel: 60°

Blændingsgrad: UGR < 19

Kapslingsklasse: IP40

Isolationsklasse: II

Standard: Dali / Push / 1-10V

Omgivelsestemperatur: -20°C til +45°C

L90B50: 50.000 timer

## PRODUKT INFORMATION

Montering: Direkte i loft med respekt-afstand

Materiale: Lakeret aluminium

Cover: Opal afskærmning

Farve: Hvid

Pakningsstørrelse: 1 stk.

## ANVENDELSESOMRÅDER

Industri/erhvervsbygninger såsom:

- Gangarealer
- Aktivitetsarealer