



Physical Dimensions (Unit: mm/inch)

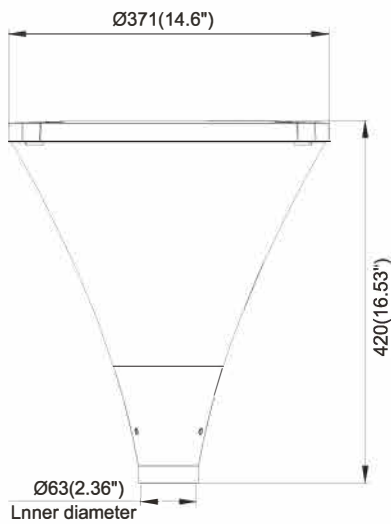

Standard version

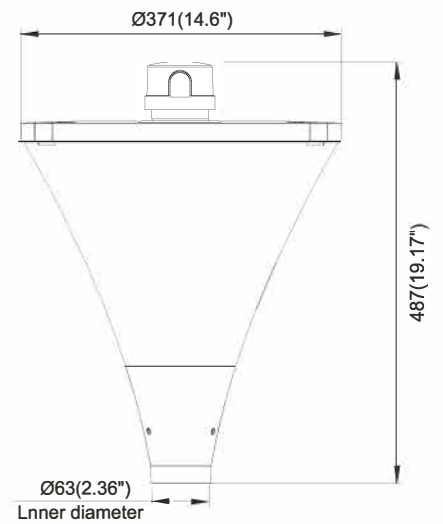

Photocell version

Installation

1.



Non Dimmable

L	—	black
N	—	white
⊕	—	green
L	—	brown
N	—	blue
⊕	—	yellow/green

Dimmable

L	—	black
N	—	white
⊕	—	green
DA1/DIM+	—	red
DA2/DIM-	—	brown
L	—	brown
N	—	blue
DA1/DIM+	—	black
DA2/DIM-	—	gray

Pole size: Ø60mm(2.36")



Non Dimmable

L	—	black
N	—	white
L	—	brown
N	—	blue

Dimmable

L	—	black
N	—	white
DA1/DIM+	—	red
DA2/DIM-	—	brown
L	—	brown
N	—	blue
DA1/DIM+	—	black
DA2/DIM-	—	gray



Pole size: Ø60mm(2.36")

* Sørg for, at armaturet er korrekt jordet.


* Sørg for, at armaturet er korrekt jordet.

Monteringsvejledning

2.

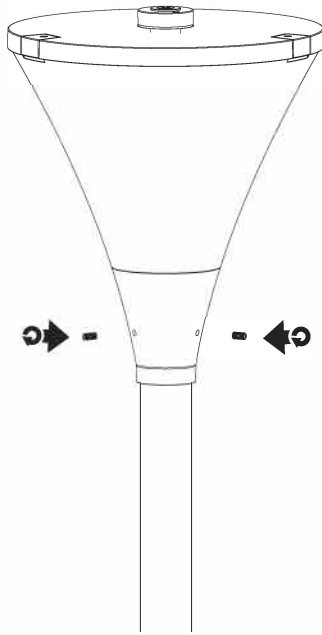

3.

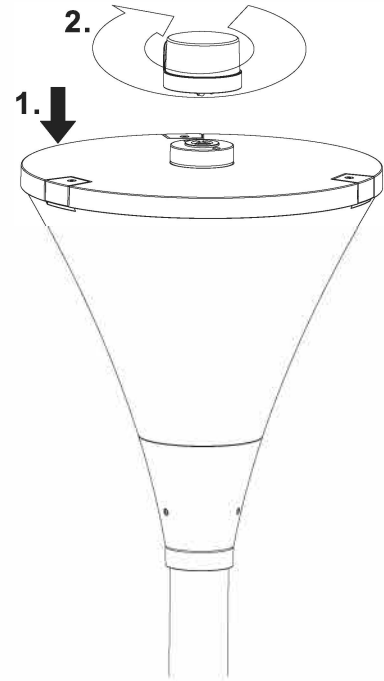

Product Specifications	20W	40W	60W	20W	40W
Luminescent mode	Direct Lighting			Indirect Lighting	
Input Voltage	100-240 VAC				
Power Frequency	50 / 60Hz				
Outlook Dimensions	Ø371x420mm(Ø14.6"x16.53")				
Luminaire Net Weight	4.6±0.3kg(10.14±0.66Lbs)				
Projected Area	0.091m²(0.98ft²)				
Working Temperature	-30°C to +50°C(-22°F to +122°F)				
Storing Temperature	-40°C to +70°C(-40°F to +158°F)				

- Lyskilden i dette armatur må kun udskiftes af producenten eller en tilsvarende kvalificeret person.
- Hvis dette armaturs eksterne fleksible kabel eller ledning er beskadiget, skal det udelukkende udskiftes af producenten eller lignende kvalificeret person for at undgå en fare.