



GERA PULLERT



Tekniske specifikationer

Power:	220-240V AC 50/60 Hz
PF:	0,90
Effektivitet:	110lm/W
SDCM:	5
Spredningsvinkel:	360°
Lysfordeling:	Indirekte
Kapslingsklasse:	IP66
IK klasse:	08
Isolationsklasse:	I
Forkobling:	On/off
Tilslutning:	Terminaler
Omgivelsestemperatur:	-30°C ~ +45°C
L70B10 (Ta 25°):	153.000 timer

El tekniske data

Antal armaturer B16A:	79
Antal armaturer C16A:	132
Lækstrøm:	<0.5mA

Produktinformationer

Montering:	Nedstøbning i terræn
Materiale:	Aluminium og PC
Farve:	Sort RAL9005 Alu RAL9006
Pakningsstørrelse:	1 stk.

Produktbeskrivelse

GERA PULLERT pullert er en stilren og moderne pullert. Armaturet er designet så blænding reduceres.


GERA PULLERT er velegnet til disse opgaver:

- Legepladser
- Stibelysning
- Parkbelysning
- Beboelsesområder



GERA PULLERT

Produkt nr.	Effekt/Watt	Lumen	Kelvin	RA	Materiale	Netto vægt (stk)
GE-PU-14-C3-AL	14	1.540	3000/4000/5000	>70	Aluminium/PC	5.3kg
GE-PU-14-C3-SO	14	1.540	3000/4000/5000	>70	Aluminium/PC	5.3kg

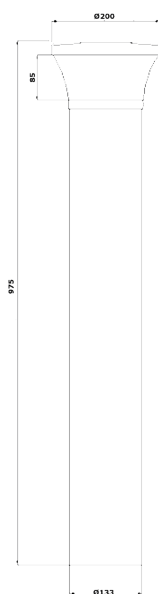

Fully-assembled 1m